

HFG01

Harmonics and Flicker Generator



Product Technical Information

Harmonics and Flicker Generator: HFG01

The Harmonics & Flicker Generator (HFG01) has been designed for the purpose of verifying harmonic and flicker test equipment. It provides an easy and reliable way to externally check the performance of the measurement system to the EN/IEC 61000-3-2 harmonics and EN/IEC 61000-3-3 flicker standards; particularly important as these tests rely on software control and calculation, and for which there is no intuitive sense of the response.

The HFG01 provides a series of harmonic and flicker disturbances of a nominal but stable level. This allows the user to periodically verify their test equipment, helping maintain compliance with standards and laboratory quality procedures. Alternatively, due to its stability, it may be used as a transfer standard from a known, calibrated test system.

The HFG01 is a standalone device and requires no additional equipment. It connects directly to the test equipment and simulates the equipment under test (EUT), generating known, repeatable levels of harmonic and flicker disturbance.



Image: HFG01

Features

- Stable load simulation
 - Repeatable measurements for test system verification
- Injects harmonics to EN 61000-3-2 and flicker to EN 61000-3-3
 - Evaluation of test systems specifically to EN standards
- Harmonic test modes
 - Steady-state harmonic-rich load current, representing a fixed load
 - Harmonic-rich load currents fluctuating between two load conditions
- Flicker test modes
 - Fixed level of mains disturbance at 1 Hz rate
 - Fixed level of mains disturbance at 8.33 Hz rate
- Compact and portable
 - Comparisons between sites and environments

- Compact and portable
- Independent power supply
 - Separate power supply to the HFG02, to avoid contamination of the test signals

Applications

- Harmonics and flicker measurement systems validation and verification
- Reference source for:
 - Daily pre-test verification checks if required by the accreditation authorities e.g. ISO 17025
 - Long term performance monitoring
- Comparison of different harmonics and flicker measurement systems

Manufacturer's calibrations

CAL12	Harmonics	Measurement of load current made according to EN 61000-3-2 in Steady State and Fluctuating Harmonics modes. Fundamental (50 Hz) to 40 th harmonic.
	Flicker	Measurement of short term flicker (P_{st}) made according to EN 61000-3-3 with disturbance at 1 Hz and 8.33 Hz rates

Specifications

Dimensions	330 mm × 320 mm × 170 mm
Weight	6.5 kgs
Power supply	External power supply, 24 Vdc, 1 A maximum
Test supply connector	1.3m captive lead with CEE7/7 plugs for connection to test equipment
Indicators	Thermal shutdown
Harmonic current	Up to 40 th harmonic: 50 Hz to 2 kHz
Flicker disturbance	1 Hz and 8.33 Hz



Standard kits

Part Number	Description	Parts included
HFG01KIT01	Standard HFG01 harmonics and flicker generator kit	<ul style="list-style-type: none"> • HFG01 harmonic and flicker generator • CAL12 – measurement of harmonics and flicker generated, all modes • Manual • External power supply

Harmonics and Flicker Generator: HFG01

Typical output measurement results

Harmonic disturbance:

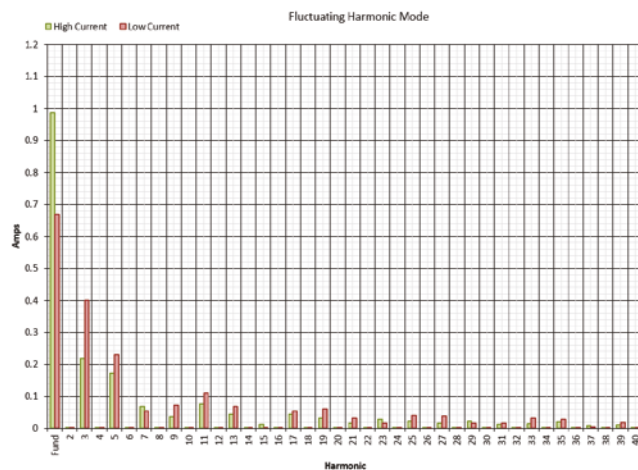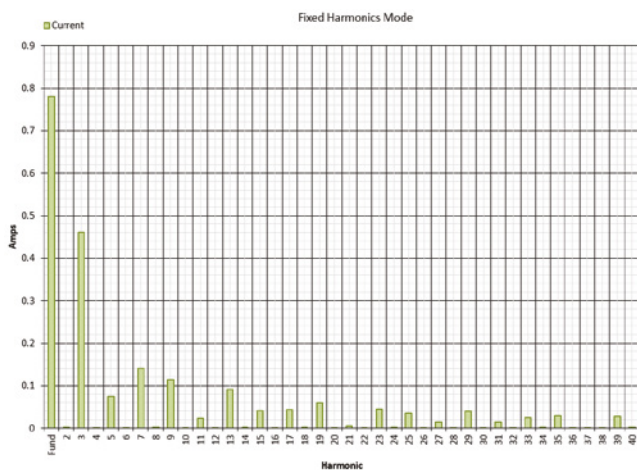

Flicker disturbance:	Rate	P_{st}^*
	1.0 Hz	0.450
	8.33 Hz	1.10

*Note that the actual P_{st} measured may depend on the measurement equipment used.

To contact us

E: enquiry@yorkemc.com
T: +44 (0)330 430 3456
www.yorkemc.com

Head Office

Eurofins York
Market Square, University of York
Heslington, York, YO10 5DD, UK

Your Smart Route to Compliance

- Compliance Testing
- Regulatory Advice and Support
- Training
- Test Instrumentation
- Calibration

